

REPLACEMENT / ALTERATION MEASURING FORM

DEALER INFORMATION

DEALER CODE: _____ DATE: _____

COMPANY NAME: PoolAndSpa.com

ADDRESS: 6724 E. Bay Blvd

CITY: Navarre STATE: FL ZIP: 32566

NEW JOB NAME: _____

PO#: _____

SHIPPING INSTRUCTIONS

SHIP TO: _____

ADDRESS: _____

CITY: _____ STATE: _____ ZIP: _____

PHONE: _____

Email: _____

ESTIMATE (Default if no box checked)

ORDER

ADDITIONAL INFORMATION

NOTE: If a cover is sent to LOOP-LOC for possible replacement, and is returned with no work done, a one-time \$106.00 inspection and handling fee will be charged. All covers returned to LOOP-LOC MUST be cleaned and dry on both sides or a \$231.00 cleaning fee will be charged.

SUPER DENSE MESH COVERS

SUPER DENSE MESH GREEN SAFETY COVER

SUPER DENSE MESH DESIGNER COLOR SAFETY COVER:

Blue Tan Gray Black

ULTRA-LOC III SOLID COVERS

(No Drains, Loop-Loc's Automatic Cover Pump must be purchased at an additional cost to be considered as a Safety Cover.)

SOLID WITH DRAINS SOLID NO DRAINS WITH PUMP

Green

SOLID DESIGNER COLOR:

Blue Gray Mocha

AQUA-XTREME MESH:

Hunter Green Sapphire Navy Mojave Brown Steel Gray

LOOP-LOC ON-GROUND SWIMMING POOL COVER

Deck must be self supporting.

On-Ground Brackets Wood Deck Anchors

REPLACEMENT COVER - Show existing anchor placement or return old cover, freight pre-paid. Specify if new hardware is required. (Return old cover whenever possible)

Note: Anchor bungee covers can not be used for replacement, pool/anchors must be A-B measured.

New Anchors New Springs Pipe (Up Charge)

No Anchors No Springs

Old Cover will be sent in if ordered

(Provide rough estimate, based on information given). For a Rough Estimate, please provide sketch, Total length of Raised Walls, Number of Cut Outs, Grid Size and Overall Length and Width.

ORIGINAL LOOP-LOC ORDER # _____

Replace Cover as is

Alter Cover as per marks and instructions. If Springs are not removed prior to shipping a Spring Removal Charge of \$83.00 will be added.

HARDWARE REQUIRED

Brass Anchors

*Brass Masonry Anchor Collars

____ *9" Pipe w/ Brass Anchor

____ *15" Pipe w/ Brass Anchor

*Wood Deck Anchors

*On-Ground Bracket

*Commercial Springs

*Deck-Loc Anchors (for composite decks)

*Stainless Steel Anchors

*Stainless Steel Masonry Anchor Collars

***Upcharge**

Only Use This Section If Extra Hardware is Required

Please note any additional hardware with quantities here: _____ / _____ / _____ / _____

Your Authorized Loop Loc Dealer

PoolAndSpa.com

800-876-7647

customerservice@poolandspa.com

Customer Name: _____

Company Name: PoolAndSpa.com

**** DISTANCE FROM POINT "A" TO POINT "B" = _____ ****

Anchors And Pool Must Be Measured From The Same Baseline. Baseline must be 3' back from any anchor.

"A-B" Measurements cannot be used unless this distance is given!

ANCHOR POINTS

A	B	A	B	A	B	A	B
1		16		31		46	
2		17		32		47	
3		18		33		48	
4		19		34		49	
5		20		35		50	
6		21		36		51	
7		22		37		52	
8		23		38		53	
9		24		39		54	
10		25		40		55	
11		26		41		56	
12		27		42		57	
13		28		43		58	
14		29		44		59	
15		30		45		60	

REQUIRED INFORMATION!

POINT TO POINT CROSS DIMENSIONS

PT. _____ to PT. _____

Distance = _____

PT. _____ to PT. _____

Distance = _____

PT. _____ to PT. _____

Distance = _____

PT. _____ to PT. _____

Distance = _____

Coping Size _____

Is Coping Rough? YES NO

Price w / Rolls of "Undr Covr" Padding?

YES NO

Price w / Sewn "Undr Covr" Padding?

YES NO

LOOP-LOC Pipe wanted For Entire Cover?

YES NO

Number of Pipes needed. _____

POOL POINTS

A	B	A	B	A	B	A	B
1		16		31		46	
2		17		32		47	
3		18		33		48	
4		19		34		49	
5		20		35		50	
6		21		36		51	
7		22		37		52	
8		23		38		53	
9		24		39		54	
10		25		40		55	
11		26		41		56	
12		27		42		57	
13		28		43		58	
14		29		44		59	
15		30		45		60	

What is Corner Radius? _____

RAISED AREAS

Begins @ PT. # _____ Ends @ PT. # _____

Begins @ PT. # _____ Ends @ PT. # _____

Begins @ PT. # _____ Ends @ PT. # _____

Begins @ PT. # _____ Ends @ PT. # _____

Please note: Loop-Loc's Cable-loc Safety

Barrier will be used in Raised Wall Area,

Existing Eyebolts Must Be Replaced With

Cable Wall Anchors.

Up and Overs


PT. # _____ Height _____

PT. # _____ Height _____

PT. # _____ Height _____

PT. # _____ Height _____

PT. # _____ Height _____

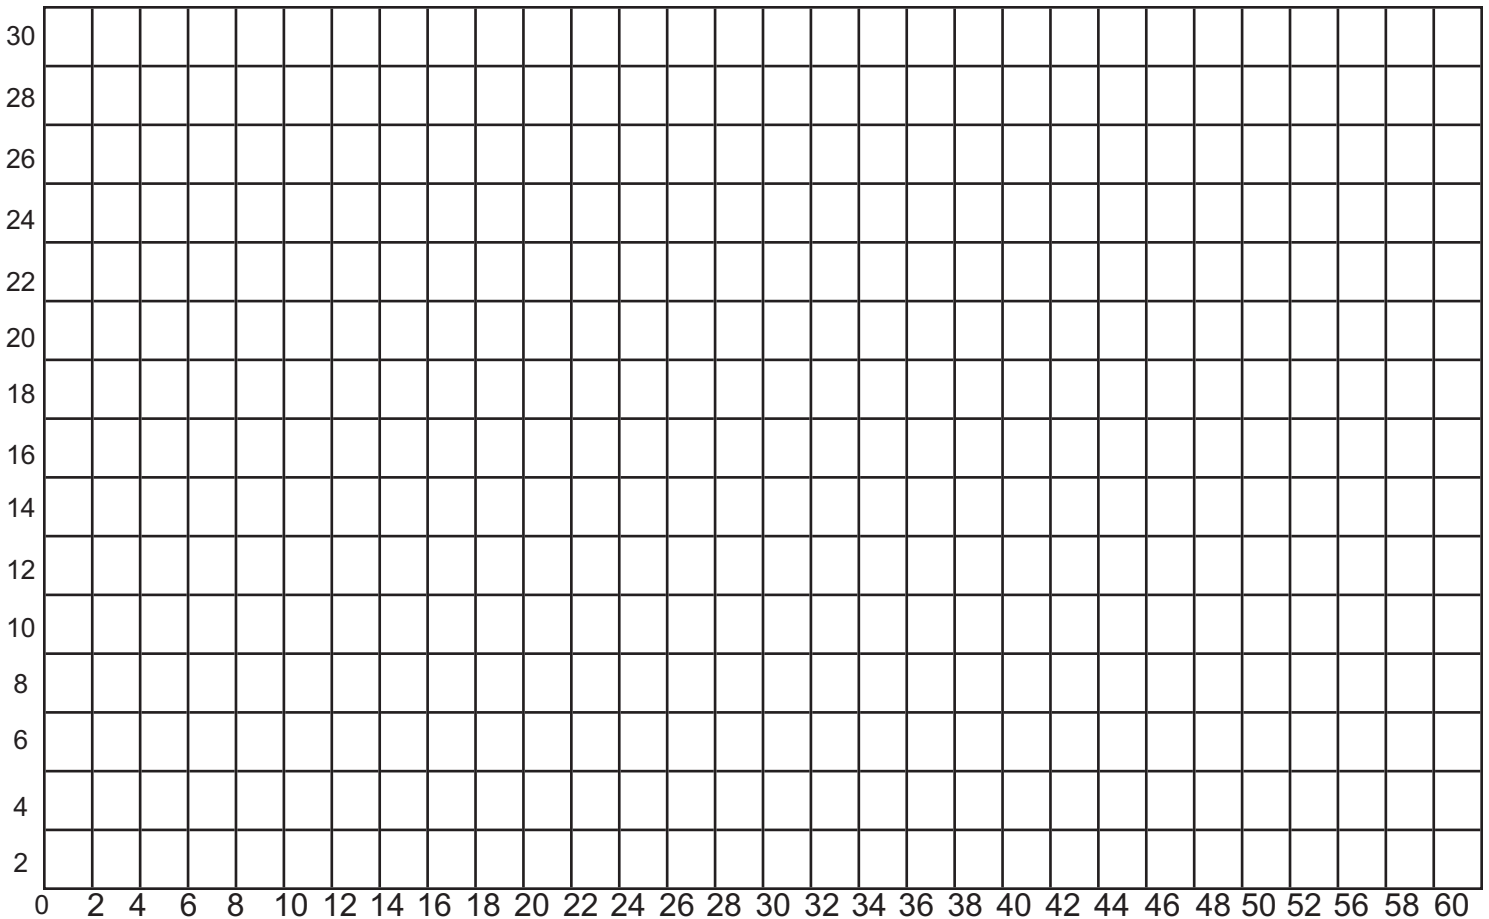

AVOID DELAYS IN PROCESSING BY ANSWERING ALL THE QUESTIONS BELOW!

REPLACEMENTS

CHECK ONE

YES NO

Overlap of Existing Cover _____

Distance Anchors are set back from poolline _____

Note: Any Anchors set back less than 27" from poolline or greater than 33" from poolline should be noted on sketch.

Discard Old Cover.....

Verify if necessary up to 25% of anchors will be redrilled.....
(If more than 25% Dealer will be notified.)

ALTERATIONS

Areas that need to be changed

Material needs to be added

From pt #. _____ To pt #. _____

From pt #. _____ To pt #. _____

From pt #. _____ To pt #. _____

Material needs to be cut down

From pt #. _____ To pt #. _____

From pt #. _____ To pt #. _____

From pt #. _____ To pt #. _____

Cut out to be added

Pt #'s _____, _____, _____, _____

Give exact location on sketch, or mark exact location on cover.

Has the cover been installed ?

If Raised Wall is being added, verify the wall is strong enough to support the cover using wall anchors.

Add drains (give location on sketch or mark cover)

Add step

Need step width and length (waterline / poolline) _____
(mark start and end point on cover or give location on sketch)

GIVE A DETAILED DESCRIPTION OF ALTERATION NEEDED:


When returned cover is Inspected, Repairs may be required. Excessive damage or wear may result in Replacement Quote only.

Job Name:/P.O.#: _____ / Dealer/Company Name: **PoolAndSpa.com** /Contact: **800-876-7647**

REPLACEMENT/ALTERATION MEASURING INSTRUCTIONS

Measure Existing Cover:


1. Begin with a freehand sketch of the cover and pool.
2. Measure the overall length and width of the cover.
3. Measure all grid sections along the width and length of the cover.
4. Measure all the cover edges from corner to corner.
5. Measure the distance the anchors are set back from poolline. Indicate on sketch any anchors that are less than 16" from poolline or more than 24" from cover.
6. Measure cover overlap.

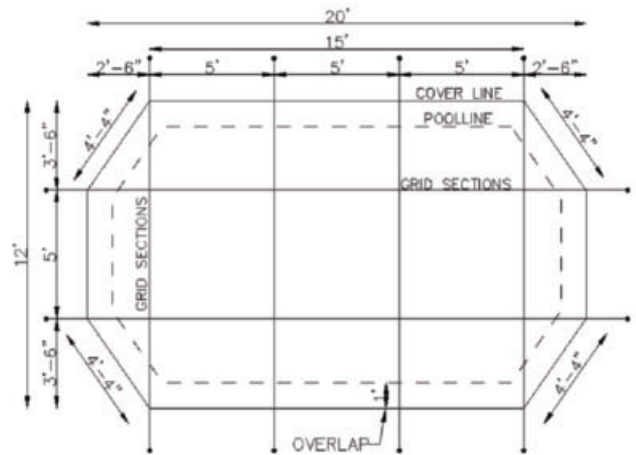

A-B Measure of Pool & Anchors:

Anchors and Pool must be measured from same baseline A-B line must be at least 3' back from any anchor

1. Begin with a freehand sketch indicating pool shape, obstructions and location of AB line.
2. Take AB measurements to each anchor on deck.
3. Take AB measurements around entire pool and to any obstructions within 3' of the pool

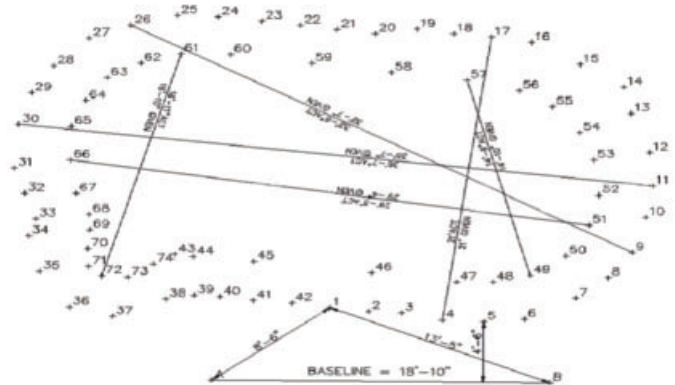

MARKING COVER INSTRUCTIONS FOR ALTERATIONS

****Use a black marker or light colored lumber crayon to mark cover. Do not place notes on the cover.****

1. If adding or taking away material show arrow in the correct direction and write dimension of amount of material to be added or taken away next to arrow.
2. Mark start and end point for raised walls, cut outs and steps.
3. New drain and pad locations should be marked with an X at the center location of where the pad or drain is wanted. Standard drain/pad sizes will be used unless otherwise noted
4. Give a detailed description of alteration on measure form.

